

SWISS

MADE®

  
**airtec**

**YOUR PARTNER**

*FOR BEST SURFACES*



**SURFACE PREPARATION,  
GRINDING, TEXTURING,  
SCARIFYING, REMOVING,  
CLEANING, SAFETY,  
GROOVING, SMOOTHING,  
FINISHING, POLISHING,  
AND DUST COLLECTION**

**35 YEARS OF EXPERIENCE**

**AIRTEC AG/SA/LTD.  
INDUSTRIESTRASSE 40  
CH-4455 ZUNZGEN/BASELSTADT**

SWISS MADE

TEL: +41(0) 61 976 95 25

FAX: +41(0) 61 976 95 26

info@airtec.com

www.airtec.com

AIRTEC© 06/2011

# CONTENTS



Shaver	Page	3
Scarifiers	Page	4-6
Cutters and Drums	Page	7
Standard and Super Premium BS-Segments	Page	8-9
Grinding and Surface Polishing Equipment	Page	10-14
Hand Tools for Pros Diamand Tools	Page	15
Chisel Hammers Air Strippers Extendo Needle Scalars	Page	16
Vacuums	Page	17

# TOUGH STUFF™

FOR SURFACE PREPARATION



AIRTEC AG/SA/LTD.  
INDUSTRIESTRASSE 40  
CH-4455 ZUNZGEN/BASELSTADT

TEL: +41(0) 61 976 95 25  
FAX: +41(0) 61 976 95 26  
info@airtec.com  
www.airtec.com

# THE ORIGINAL

## SM-320 "SHAVE-MASTER" DIAMOND-DRUM-CONCRETE PLANER

### Applications:

- Coating Removal
- Repair Curled Joints
- Slurry Cap Removal
- Grooving
- Aggressive Milling

### Now Available in 20 HP!

- Get Maximum Profile
- Ability to Run 1/4" Thick Blades



### Specifications:

<i>Power</i>	15 HP or 20 HP 400 V / 50 Hz
<i>Cutting Weight</i>	320 mm
<i>Weight</i>	320 Kg (15 HP) / 375 Kg (20 HP)
<i>Option</i>	Gasoline HONDA 20 HP



**20HP**

SWISS MADE



### VISTA - FLOOR® SURFACE PREPARATION

AIRTEC AG/SA/LTD.  
INDUSTRIESTRASSE 40  
CH-4455 ZUNZGEN/BASELSTADT  
TEL: +41(0) 61 976 95 25  
FAX: +41(0) 61 976 95 26  
info@airtec.com  
www.airtec.com

## FOR PROFESSIONAL RT-2000

The reliable ROUGHENING-and CLEANING MACHINE for tough tasks on the surface.

The assembled Depth Control Wheel allows a precise operation with the cutters on the surface.

The dust connection allows an almost dust free and environment friendly operation. With safety switch EMERGENCY STOP.



## PROFI RT-2000

<b>Working Width</b>	200 mm
<b>Dimensions</b>	L.: 1180 mm/B: 360 mm/ H: 1108 mm
<b>Weight</b>	72 Kg
<b>Power</b>	B Honda 5.5 HP or electric EL. 1 X 230 V 1,80 KW 50 Hz 3 X 400 V 2,20 KW 50 Hz



The light-weight paint and glue scarifier for small surfaces. Removes easily glue residues. Additionally tools can be attached easily. Cutters and drums of different material and forms can be changed. The dust connection allows an almost dust free and environment friendly operation. With safety switch ON-OFF

SWISS MADE



The light-weight and handy scarifier for small and medium surfaces

- easy and fast change of drums
- dust free
- environment friendly operation
- with safety switch ON/OFF

## RS-165

<b>Working Width</b>	165 mm
<b>Dimensions</b>	L: 750 mm/B: 390 mm/H: 970 mm
<b>Weight</b>	35 Kg
<b>Power</b>	Electric EL. 1 X 230 V 1,1 KW 50 Hz

## ECONOMY ES-200

<b>Working Width</b>	200 mm
<b>Dimensions</b>	L: 900 mm/B: 360 mm H: 1000 mm
<b>Weight</b>	B. 53 Kg / EL. 57 Kg
<b>Power</b>	B Honda 5.5 PS or electric EL. 1 X 230 V 1,80 KW 50 Hz 3 X 400 V 2,20 KW 50 Hz



**RT-2500**

<b>Working Width</b>	250 mm
<b>Dimensions</b>	L: 1125 mm/B: 480 mm/ H: 1180 mm
<b>Weight</b>	B: 134 Kg / EL: 129 Kg
<b>Power</b>	B. Honda 7,2 PS oder elektrisch 400 V 4,0 KW 50 Hz

All-round scarifying with the robust surface cleaner for medium sized surfaces. The assembled Depth Control Wheel allows a precise operation with the cutters on the surface. The dust connection allows an almost dust free and environment friendly operation.

With safety switch EMERGENCY STOP.



**RT-3200**

<b>Working Width</b>	320 mm
<b>Dimensions</b>	L: 1450 mm/B: 580 mm/ H: 1100 mm
<b>Weight</b>	B: 204 Kg / EL: 214 Kg
<b>Power</b>	B. Honda 8 HP or electric EL-400 V 5,5 KW 50 Hz



**RM-320**  
Self-Propelled Power Planer

<b>Working Width</b>	320 mm
<b>Dimension</b>	L: 1400 mm/B: 580 mm/ H: 1000 mm
<b>Weight</b>	B: 340 Kg EL: 320 Kg
<b>Power</b>	B. Honda 20 HP or electric EL-400 V 11 KW 50 Hz

**FOR PROS!**

The fast and handy SCARIFIER and CLEANER designed for larger areas. With controlled back and forward drive. The dust connection allows an almost dust free and environment friendly operation.

With safety switch EMERGENCY STOP.




SWISS MADE



## RT-2500 DUO PRO DUAL DRUM POWER PLANER

<b>Working Width</b>	2 X 250 mm
<b>Dimensions</b>	L: 1125 mm/B: 480 mm / H: 1180 mm
<b>Weight</b>	B: 204 Kg / EL: 214 Kg
<b>Power</b>	B. Honda 20 PS oder elektr. EL- 2 x 5,5 KW 400 V 50 Hz

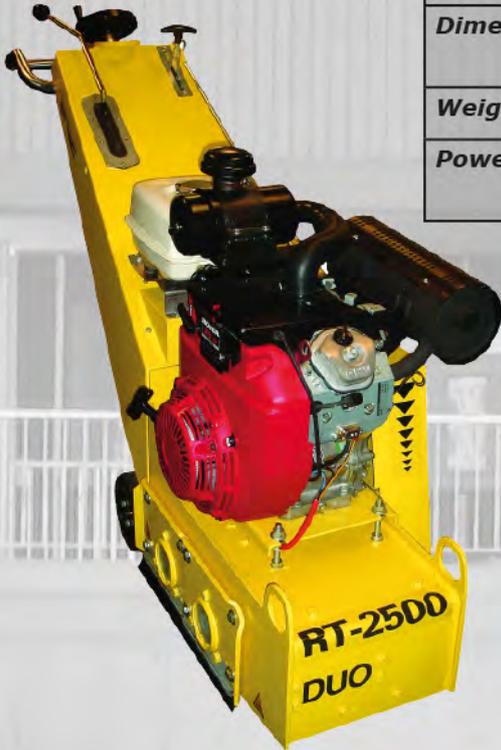

### Double your Production!

#### Features:

- Hydrostatic Drive / Self Propelled
- Micro Depth Control
- Differential Axle
- Vacuum Port
- Sealed Bearings
- Forward and Reserve Drive
- Quick Lift-Off Lever
- Adjustable Handle
- Tooth Drive Belt
- Side Access Drum Assembly.

## RR-300 ROTO RUNNER®

Milling Machine for Asphalt and Concrete

#### Applications:


- Scarifying of Old Surfaces (Concrete and Asphalt)
- Preparing of Roads and Payment
- Milling and Scarifying Right Up To The Edge
- Removing of Markings and Thermoplastics
- Compact and Lightweight Construction

#### SPECIFICATION

<b>Working Width</b>	max. 400 mm
<b>Weight</b>	ca. 1800 Kg + Extra weight
<b>Power</b>	46 HP / 34 KW
<b>Motor</b>	Diesel- or Electric motor



Detailed Control panel for Easy Operations

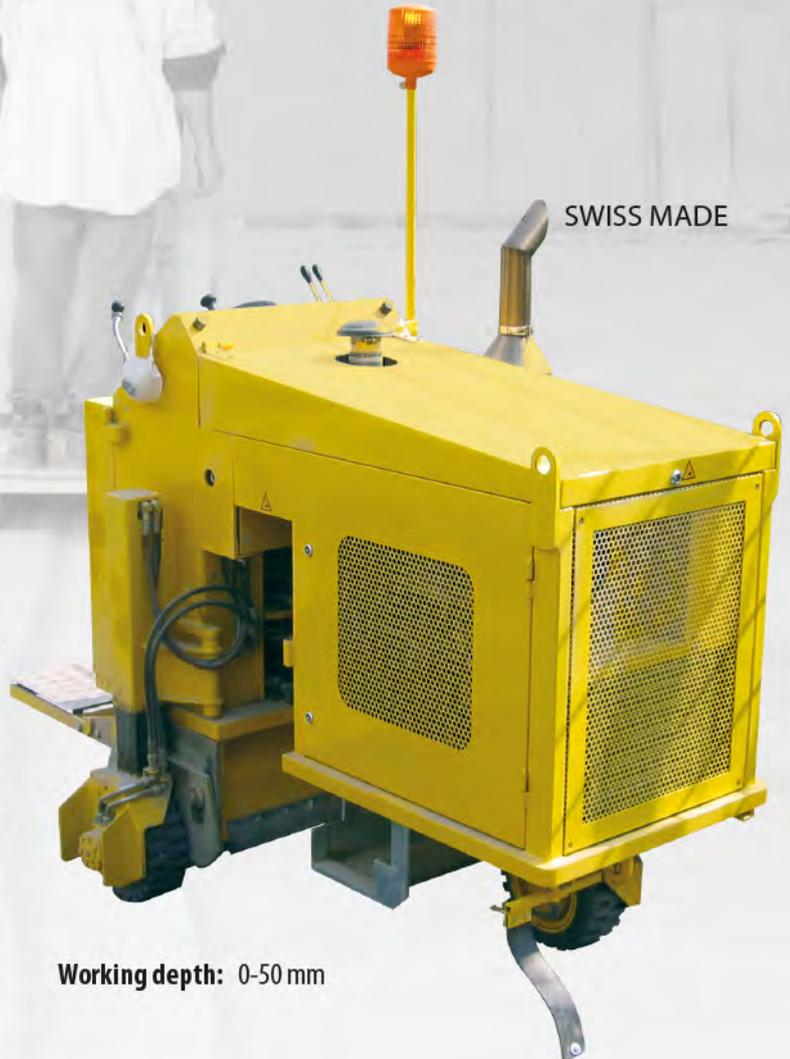

SWISS MADE

Working depth: 0-50 mm

## Tungsten Carbide Tipped Cutters

Typ	Article.No.	OD	ID	Thickness
HMT 5.40	AT-999-605	16mm	6mm	40mm
HMT-6.44	AT-999-650	15mm	6mm	44mm
HMT 6.46	AT-999-600	15mm	6mm	46mm
HMT 8.200 (PIC)	AT-999-1225	30mm	8mm	80mm
HMT 8.55/15	AT-999-980	15mm	6mm	55mm
HMT 8.55/20	AT-999-940	20mm	6mm	55mm
HMT 8.55/25	AT-999-930	25mm	6mm	55mm
HMT 12.200	AT-999-1261	30mm	8mm	80mm
HMT 12.200	AT-999-1261.1	26mm	8mm	80mm



5pt. HMT



6pt. HMT



STR-4




ET-4



TMO-5



TSR



8pt. HMT



12pt. HMT



TMO-6




TMO-12.20



WCT



TMO-7



## Steel Beam and Star Cutters

Typ	Article.No.	OD	ID	Thickness
STR-4	AT-999-610	15mm	4mm	50mm
COR 4	AT-999-620	16mm	5mm	51mm
STR-5	AT-999-1301	25mm	5mm	78mm
ET-4	AT-999-615	15mm	4mm	50mm
ET-5	AT-999-1231	25mm	5mm	74mm
SR 2,5	AT-999-6661	8mm	2,5mm	31,5mm
SR-5	AT-999-6671	11,5mm	5mm	31,5mm

## Milling Cutters

Typ	Article.No.	OD	ID	Thickness
TMO 5.22	AT-999-631	15mm	22mm	40mm
TMO 6.22	AT-999-1701	30mm	20mm	80mm

## Full Tungsten Carbide Cutters

Typ	Article.No.	OD	ID	Thickness
TSR-3.5	AT-999-6851	11,5mm	3,5mm	30mm
TSR-5.5	AT-999-6861	11,5mm	5,5mm	30mm
TSR-7.5	AT-999-672	11,5mm	7,5mm	30mm
WCT-3.5	AT-999-6711	12mm	3,5mm	26mm
WCT-6.0	AT-999-6871	12mm	6mm	26mm
TMO-7.11	AT-999-660	11mm	11mm	33mm
TMO-7.15	AT-999-990	15mm	15mm	44mm
TMO-12.20	AT-999-1801	22mm	20mm	55mm

***We carry Replacement  
Drums & Shafts***

### Anhydrite

AT-00-1

(Grit 7/8 and 16/18)  
Metal bonded diamond tool with two grinding anhydrite segments



### Coating Removal



AT-DSF1-M1-R  
AT-DSF1-M6-L

For removing thick coatings / adhesives.  
**ATTENTION!** Not for concrete grinding, surface must be even; NO stones, NO metal parts!



AT-PCM-8L /  
AT-PCM-8R

2 pieces PCM/HM segments very aggressive grinding. Removal of heavy coatings and adhesives.  
**ATTENTION!** Not for concrete grinding, surface must be even; NO stones, NO metal parts!



AT-PCM-9L /  
AT-PCM-9R

For removing coatings / adhesives.  
**ATTENTION!** Not for concrete grinding, surface must be even; NO stones, NO metal parts!

### Metal Bond Universal Style

AT-CA-6

(Grit 6)  
Removing and grinding of coatings and paints.



AT-CA-16

(Grit 16)  
Removing coatings of 20 mils and less.  
Leveling and fine grinding after shot blasting.  
Leaving behind a smooth surface.



AT-CA-40

(Grit 40)  
A segment to start concrete polishing.  
Also fine grinding.



AT-CA-80

(Grit 80)  
Polishing of concrete surfaces



AT-CA-150

(Grit 150)  
For polishing surfaces. For dry application on concrete.



# „SUPER PREMIUM“ BS-Segmente

## „HARD BOND“ Beton Schleifen



AT-SP-150HB Violett  
AT-SP-80HB Grün  
AT-SP-40HB Blau  
AT-SP-16HB Rot  
AT-SP-6HB Gelb

## „MEDIUM BOND“ Beton Schleifen



AT-SP-150MB Gold  
AT-SP-80MB Hellblau  
AT-SP-40MB Violett  
AT-SP-16MB Orange  
AT-SP-6MB Ocker

## „SOFT BOND“ Beton Schleifen



AT-SP-6SB Braun



AT-SP-16SB Blau



AT-SP-40SB Schwarz



AT-SP-80SB Pink



AT-SP-150SB Rot

## BETON POLIEREN



AT-PD-C-200

AT-PD-C-800

AT-PD-C-3500

AT-PD-C-400

AT-PD-C-1800

## HYBRID POLIEREN



AT-PD-HYC-30  
AT-PD-HYC-50  
AT-PD-HYC-100

## GRANIT



BS-PD-G-100  
BS-PD-G-200

BS-PD-G-400  
BS-PD-G-600

BS-PD-G-800  
BS-PD-G-1500

BS-PD-G-3000

## MARMOR



AT-PD-M-50  
AT-PD-M-120  
AT-PD-M-220  
AT-PD-M-400  
AT-PD-M-800  
AT-PD-M-1800

## MAGNET-HALTEPLATTEN



BS-450-240



BS-550-240



BS-600-6400



BS-800-8400



BS-240-047



BS-450-213



BS-550-145



BS-800-8337

## VELCRO - HALTEPLATTEN

## Features:

- Compact Robust Steel Design with Unique Planetary Grinding System
- Wide Variety of Tools Available
- Easy Coupling to Industrial Dust Collection Systems
- 3 Counter-Rotating Tool Heads with Planetary movement perform excellent grinding and polishing results.

### BS-450

<i>Working Width</i>	450 mm
<i>Dimensions</i>	L: 1003 mm B: 450 mm H: 980 mm
<i>Weight</i>	116 Kg
<i>Power</i>	1 x 230 V 2,2 KW 50 Hz
<i>Speed</i>	1430 UPM

### BS-550

<i>Working Width</i>	550 mm
<i>Dimensions</i>	L: 1650 mm B: 550 mm H: 1005 mm
<i>Weight</i>	225 Kg
<i>Power</i>	3 x 400 V 5,5 KW 50 Hz
<i>Speed</i>	300 - 1460 UPM



## Features:

- Polishing Concrete, Stone and Terrazzo
- Preparation and Renovation of Concrete Floors
- Removal of Adhesives, Coatings, and Paint
- Floor Leveling
- Exposing Aggregates
- Wet and Dry Diamond Grinding
- Slurry Cap Removal

## BS-800

<i>Arbeitsbreite:</i>	800 mm
<i>Abmessungen:</i>	L: 1600 mm B: 900 mm H: 1005 mm
<i>Gewicht:</i>	445 Kg
<i>Antrieb:</i>	3 x 400 V 11 KW 50 Hz
<i>Drehzahl:</i>	290 - 860 UPM (Drehzahlregulierung)




# FINALLY AN EDGE RAZOR THAT WORKS !!!



## BS-240 (EDGE RAZOR<sup>®</sup>)

- Powerful 3 HP Motor
- 5 Position Swiveling Head
- Utilizes the Same Tooling as Most Large Polishers on the Market

<b>Working Width</b>	240 mm
<b>Weight</b>	65 Kg
<b>Power</b>	electr. motor 1,8 KW 50 Hz 230 V
<b>Speed</b>	300 - 1700 UPM (Speed Regulation)
<b>Optio:</b>	Fixed Speed

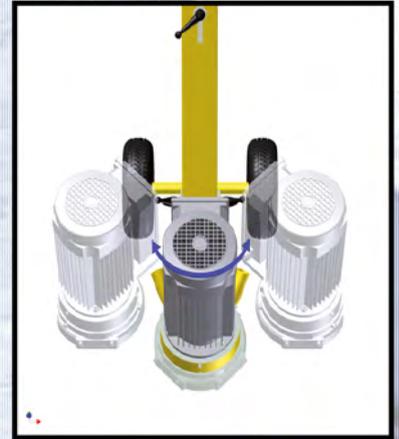

## The Tough Floor Grinder and Adhesive Remover

- Unique Floating System for Different Grinding and Removal Jobs
- Removeable Sideplate to get to the Exact Edge of Wall
- Compact and Lightweight
- Vacuum Port for Dust Free Operation
- Wide Range of Diamond Tools Available
- Soft on Floors - Tough on Adhesives

<b>Working Width</b>	270 mm
<b>Weight</b>	65 Kg
<b>Power</b>	electr. motor 400 V / 3 -Phasen / 50 Hz 2,2 KW 230 V / 1 - Phase / 50 Hz 2,2 KW
<b>Speed</b>	1500 UPM.



# BS - 500 4 x 4 QUATTRO

## FOR LARGE PROJECTS

The powerful Floor Grinder / Polisher for large projects



- 4 Counter-Rotation tool heads
- Important production rates
- Wet / Dry setup
- Easily operated by a single person

**VARIABLE SPEED DRIVE**



4 Counter-Rotation Heads hold 12 Diamond segments for grinding / pads for polishing



### BS-500 4 x 4 QUATTRO

**NEW WITH  
„EASY-CLICK“<sup>®</sup> FAST  
TOOL CHANGE SYSTEM**

<i>Working Width</i>	500 mm
<i>Dimensions</i>	L: 1650 mm B: 550 mm H: 1005 mm
<i>Weight</i>	330 Kg
<i>Power</i>	3 x 400 V 11 KW 50 Hz
<i>Speed</i>	300 - 1460 UPM

**ABRAZR<sup>®</sup> - MOD. DÉP. AIRTEC  
INTERNATIONAL PROTECTED DESIGN AIRTEC**

## BS-600-ELECTRO

<b>Working Width</b>	600 mm
<b>Dimensions</b>	L: 1100 mm B: 700 mm H: 1000 mm
<b>Weight</b>	177 Kg
<b>Power</b>	3 x 400 V 5,5 KW 50 Hz
<b>Speed</b>	440 UPM

## The Ultimate Floor Prep Machine!

- Aggressive Coating Removal
- Flattening Surfaces
- Leveling of Concrete Surfaces
- Preparing Concrete Floors
- Variety of Diamond Tools Available
- Add available weights for more aggressive cutting



- Spritzwasser - System für Einsatz auf Beton- und Terrazzoflächen
- Hoher Schleifdruck
- Vibrationsarm

SCHNELLER WERKZEUG WECHSEL



## BS-440-EL WITH SPEED REGULATION

### Specialty Floor Coating and Adhesive Remover

<b>Working Width</b>	440 mm
<b>Dimensions</b>	L: 1010 mm B: 470 mm H: 970 mm
<b>Weight</b>	104 Kg
<b>Power</b>	3 x 400 V 4,0 KW 50 Hz
<b>Speed</b>	300-1460 UPM

- Aggressive Coating Removal, Mastics
- Flattening Surfaces
- Leveling of Concrete and Overlays
- Preparing Concrete Floors
- Variety of Diamond Tools Available



SWISS MADE



## ECO-FRIENDLY

### JR-100 & JR-637 Hand Held Scarifiers



<b>Working Width</b>	100 mm
<b>Weight</b>	5,3 Kg
<b>Power</b>	1200 W 230 V 50 Hz
<b>Speed</b>	600 - 3000 UPM



<b>Working Width</b>	150 mm
<b>Weight</b>	6,2 Kg
<b>Power</b>	1500 W 230 V 50 Hz
<b>Speed</b>	800 - 2400 UPM

## RIGHT UP TO EDGE!

### Applications:

- Roughening
- Abrading
- Scabbling
- Descaling
- Texturing
- Cleaning
- Remove resins, paint
- Remove adhesives

### CONCRETE GRINDERS BS-125, BS-150, BS-180



Leistungsfähige und leicht zu führende Schleifgeräte, besonders geeignet für Randbearbeitung.

Flexible, Spring Loaded Dust Hood with Removeable Sideplate



Working Width: 125 mm - 180 mm

## NEW WITH TURBO-TECHNOLOGIE

## HUGE RANGE OF DIAMOND - TOOLS



**MULTI - SHAPE Diamond Disc**  
Medium Bond  
- 180 mm Ø  
- 125 mm Ø  
for concrete grinding



**SWIRL Diamond Disc**  
- 180 mm Ø  
- 100 mm Ø  
Covers larger surface area with more diamonds



**RED KING Diamond Disc**  
Soft Bond for hard surfaces  
- 180 mm Ø



**DOUBLE Diamond Disc**  
Soft Bond, for concrete grinding  
doppelseitig - 180 mm Ø  
- 115 mm Ø



**PCD (POLYCRYSTAL) Diamond Disc**  
- 125 mm Ø  
- 175 mm Ø  
Super results and wear resistance unmatched productivity on adhesives and paint removal. Will leave some scratch marks on soft surfaces



**RAPTOR Diamond Disc**  
- 180 mm Ø  
- 125 mm Ø  
For Removal - Cleaning - Roughening (Acryl, Latex, Epoxy, Adhesives)



**LIGHTWEIGHT** AT-1010



AT-2020-S



AT-001

**SUPERFAST**



AT-2020

**MANAGEABLE**

## Pneumatic Chisel Hammers

Fast and easy removal of concrete and cement residues on any surface

Model	Air Consumption	Weight
AT-1010	116 l/min	1.100 Kg
AT-2020-S	135 l/min	1.800 Kg
AT-001	95 l/min	1.800 Kg
AT-2020	135 l/min	2.100 Kg
AT-3030	163 l/min	2.800 Kg
AT-4040	234 l/min	3.800 Kg



AT-3030

**MULTIFUNCTIONAL**



AT-4040

**POWERFUL**

## Air-Stripper

This powerful air operated Floor Stripper for removing carpet, vinyl, tiles, mastic, and rubber from wood and concrete surfaces.



## Extendo-Druckluftschläger

Powerful Long Reach Scalers and Chisel Hammers for fast removal of dirt, paint, adhesives, rust, and chemicals from floors, walls and decks.



SWISS MADE



## Pneumatic Needle Scalers

Use on any surface for Derusting, Descaling, Removing Paint, Trimming Weld Seams, Exposure of Concrete Aggregate and much, much more!

Modell	Blows/min	Air Consumption	Weight
AT-1	5050	116 l/min	1.500 Kg
AT-1-K	5050	116 l/min	1.400 Kg
AT-2-S	4850	135 l/min	2.600 Kg
AT-2-SK	4850	135 l/min	2.500 Kg
AT-0	5900	95 l/min	2.200 Kg
AT-2	4850	135 l/min	2.600 Kg
AT-2-K	4850	135 l/min	2.500 Kg
AT-3	3830	163 l/min	3.600 Kg
AT-3-K	3830	163 l/min	3.400 Kg
AT-4	2980	234 l/min	5.800 Kg
AT-4-k	2980	234 l/min	5.600 Kg



# Industrial Vacuums with Power!

## DUSTAWAY BY AIRTEC®

**MOD. KV-1500-EL STANDARD**  
230 V



**MOD. KV-1500-EL SPEZIAL**  
400 V



**MOD. KV-3000-EL**



**MOD. KV-5500-EL**




Technical Data	
<b>Power</b>	1,5 KW / 50/60 HZ
<b>Voltage</b>	230 / 400 V 1~
<b>Max. Amp drawing</b>	9,5 Ampere
<b>Motor protection</b>	IP55
<b>Max. airflow</b>	230m3/h
<b>Max. water lift</b>	2750 mm. H20
<b>Max.water lift on continuous duty</b>	1900 mm. H20
<b>Filter type</b>	1 cartridge
<b>Filter surface</b>	30.000 cm2
<b>Filter efficiency</b>	class M / 1 micron
<b>Filter cleaning type</b>	manual
<b>Collection container capacity</b>	35 liters
<b>Noise level</b>	70 dB
<b>Pressure relief valve</b>	installed

Technical Data	
<b>Power</b>	3,0 KW / 50/60 HZ
<b>Voltage</b>	400 V 3~
<b>Motor protection</b>	IP55
<b>Max. airflow</b>	300 m3/h
<b>Max. water lift</b>	3000 mm. H20
<b>Max.water lift on continuous duty</b>	2300 mm. H20
<b>Filter type</b>	1 cartridge
<b>Filter surface</b>	30.000 cm2
<b>Filter efficiency</b>	class M / 1 micron
<b>Filter cleaning type</b>	manual
<b>Collection container capacity</b>	35 liters
<b>Noise level</b>	73 dB
<b>Pressure relief valve</b>	installed


Technical Data	
<b>Power</b>	5,5 KW / 50/60 HZ
<b>Voltage</b>	400 V 3~
<b>Motor protection</b>	IP55
<b>Max. airflow</b>	550 m3/h
<b>Max. water lift</b>	3000 mm. H20
<b>Max.water lift on continuous duty</b>	2200 mm. H20
<b>Filter type</b>	2 cartridges
<b>Filter surface</b>	56.000 cm2
<b>Filter efficiency</b>	class M / 1 micron
<b>Filter cleaning type</b>	automatic - reverse pulse compressed air cleaning
<b>Collection container capacity</b>	100 liters
<b>Noise level</b>	75 dB
<b>Compressor</b>	installed
<b>Pressure relief valve</b>	installed

# Industrial Vacuums with Power! DUSTAWAY BY AIRTEC® ECONOMY-LINE

**RONDA 200**



**DRY**

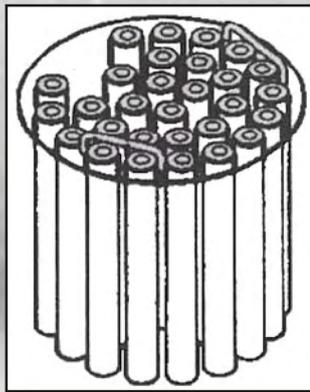

Technical Data	
Power	1200 W / 230V / 50 HZ
Filter surface	8.000 cm <sup>2</sup>
Collection container capacity	16 liters
Hose bore	Ø 38mm
Width	42,5 cm
Height	78 cm
Weight	15 Kg

**PATENTED FILTER-SYSTEM**

**MASTER M450 S**



**HEPA - FILTER**

**WET AND DRY**

Technical Data	
Power	3 KW / 50/60 HZ 3450 W
Voltage	230 V 3~
Max. airflow	540 m <sup>3</sup> /h
Filter type	Polyester
Max.water lift on continuous duty	2500 mm. H <sub>2</sub> O
Filter surface	20.000 cm <sup>2</sup>
Filter efficiency	G/L 3 micron
Collection container capacity	60 Liter
Noise level	76 dB
Hose bore	Ø 80mm
Dimensions	58 x 60 cm
Height	150 cm
Weight	65 Kg

# NEW

## MEGA STARKER Bodenbelags-Stripper für den Profi!!!



different chisels



### PM-1600-EL

<b>Voltage</b>	230 Volt   50/60 Hz   1600 W
<b>Working Width</b>	20 mm - 100 mm (je nach Meissel)
<b>Impact energy</b>	27 Joule
<b>Weight</b>	45.00 kg

#### Entfernen und abschälen

Sportbelägen • Teppich • Flexplatten • PVC Beschichtungen • Gumminoppen • Fliesen • Bitumen • Holzbelägen • Dachbeläge • Parkett etc.

#### Geräte-Eigenschaften

Angriffwinkel verstellbar • Hoher Bedienungskomfort  
• Personenschutzschalter NOT-AUS • Leicht zu transportieren •  
Verschiedene Schäl- wie auch Meisselwerkzeuge lieferbar

### BS-27-ECO

<b>Input Power</b>	2.2 KW / 1x230 V / 14,5 A
<b>Dimensions</b>	800 / 480 / 950 mm
<b>Weight</b>	(mit Schleifsausrüstung) 51 kg

- Untergrundvorbereitung von Fussböden
- Teppich-, Kleber- und Farbresten entfernen
- Entfernung von Epoxybeschichtungen mit PKD-Diamant Segmenten



**Schleifsegmente  
für jeden Einsatz lieferbar**



**schneller, problemloser  
Werkzeugwechsel  
auf der Baustelle!**





ISO 9001  
BUREAU VERITAS  
Certification



For further information call:

# AIRTEC AG / SA / LTD

Industriestrasse 40  
CH-4455 Zunzgen / Baselland, Schweiz

Tel.: +41(0) 61 976 95 25

Fax: +41(0) 61 976 95 26

info@airtec.com

www.airtec.com

## AIRTEC SERVICE BAD SÄCKINGEN

Scheffelstrasse 11  
D-79713 Bad Säckingen  
Tel: +49(0) 7761 553 4888  
Fax: +49(0) 7761 553 5786



**FOR BEST SURFACES  
GRINDING-TEXTURING  
SCARIFYING-REMOVING  
CLEANING-SAFETY GROOVING  
SMOOTHING-FINISHING  
POLISHING-SHOT BLASTING  
AND DUST COLLECTION**